

SSELICK S Series



Powered by **ecoMAX T4i**

The Sellick S Series rough terrain
forklift

Rugged
Dependable
Responsive

S Series rough terrain forklifts

6 000, 8 000, 10 000, 12 000 lbs capacity @ 24" load centre



Standard specifications

The S Series straight mast rough terrain forklift provides optimum operator visibility, safety and comfort while maximizing machine performance. The one-piece frame welded construction offers rugged durability. The isolated, rubber-mounted operator's compartment is designed to reduce noise and vibration. Operators benefit from greater fork visibility and control. All controls and instrumentation are close at hand.

Engine



Ecomax T4i interim Tier 4 engine does not require exhaust aftertreatment. Diesel Particulate Filter (DPF) and Diesel Exhaust Fluid (DEF) are not required reducing operating costs.

This four-cylinder, direct injection, diesel engine provides 74 hp and comes equipped with dual element air filter with precleaner, water separator, vertical exhaust and cold weather starting aid. Torque rating 243 ft-lbs @ 1100 rpm. Fuel capacity: 26 gallons (98 L).

Transmission

Four-speed (3-speed in S120 models) fully synchronized torque converter with power reversing integral parking brake. Optional fully automatic powershift.

Axles

Drive: Pad-mounted rigid planetary axle, torque proportioning four-pinion differential, gears are specially-shaped to transfer torque between wheels. Positive retraction brakes.

2WD Steer: Pin-mounted, oscillating axle with sealed tapered roller bearings. Oscillation: 14°

Optional 4WD Steer: Outboard planetary with torque proportioning differential. On the go engagement

Steering

Load sense power steering with hydraulic pump assistance.
Steer turns: 4.5 lock to lock.

Electrical system

Voltage: 12 V; alternator: 95A; battery: 1000 CCA.

Operator compartment

Fully isolated, floating operator's compartment exceeds ANSI B56.6 ROPS/FOPS standard. Adjustable suspension seat with retractable seatbelt, tilt steering column, cupholder, coat hook, latched operator's manual compartment, Operator's Manual, safety decal package.

Brake system

Service brake: Power-assisted braking system with enclosed oil-immersed multi-disc service brakes.

Parking brake: Independent parking brake system, mechanical-operated, lever-applied, manually-adjusted caliper, mounted on transmission output shaft, disc diameter 279.4 mm (11 inches).

Instruments

Standard indicator lights located on the steering console for easy vehicle performance monitoring. Full instrumentation includes warning indicator lights and gauges, horn and backup alarm.

Gauges: engine coolant temperature, voltmeter, fuel level, transmission temperature gauge, hour meter.

Indicator lights: low voltage, low engine oil pressure, engine coolant temperature, park brake, service brake pressure, transmission pressure, transmission temperature, preheat, water-in-fuel, air filter restriction.

Hydraulics

Closed hydraulic system powered by cast iron load sense hydraulic gear pump. A positive-pressure hydraulic tank prevents impurities from entering the system.

Tank capacity: 21 gallons (79 L)

Hydraulic flow rate: 24 gpm @ 2200 rpm

Mast assemblies

Sellick SEE-THRU® all-roller design. Two and three-stage available. Mast sideshift: 6" total.

Carriages

ITA hook or shaft-type carriages equipped with 6 rollers and 4 side thrust rollers.

Standard features

- Adjustable suspension seat
- Tilt steering column
- Retractable seatbelt
- Fuel/water separator
- High air engine precleaner
- Power assisted enclosed wet multi-disc brakes
- Load sense power steering
- Halogen lighting package includes two front and two rear adjustable worklights
- Safety lighting includes LED brake lights & amber warning light
- Backup alarm
- Automotive style park brake with neutral interlock
- Neutral safety start


Optional Equipment

- | | |
|--------------------|-------------------|
| - Cab | -Turn Signals |
| - Air Conditioning | -Mirrors |
| - Fork Positioner | -AM/FM MP3 player |



S Series rough terrain forklifts

6 000, 8 000, 10 000, 12 000 lbs lift capacities @ 24" load centre

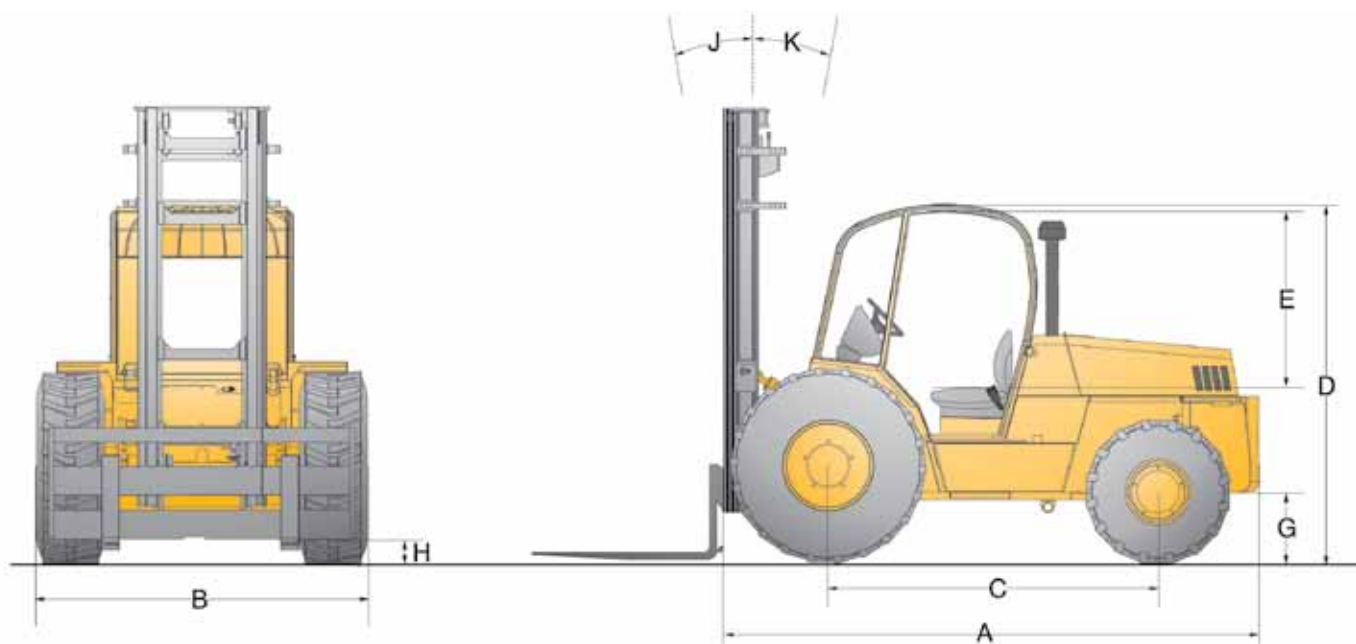

Model	Ref	S60	S80	S100	S120
Lift capacities @ 24 inch load centre		6 000 lbs	8 000 lbs	10 000 lbs	12 000 lbs
Total weight (w/2 stage mast)		14,843 lbs	16,168 lbs	19,389 lbs	21,564 lbs
Overall length (without forks)	A	149"/3 785 mm	150"/3 810 mm	152"/3 861 mm	159"/4 039 mm
Overall width	B		89"/2 261 mm		
Wheelbase	C		89"/2 261 mm		
Height to top of overhead guard (std)	D		95"/2 413 mm		
Distance from seat to overhead guard (std)	E		43"/1 092 mm		
Outside turning radius			178"/4 521 mm		183"/4 648 mm
Aisle width 90° stacking			266"/6 756 mm		271"/6 883 mm
Frame underclearance	G		15"/381 mm		
Mast underclearance	H		12"/305 mm		
Mast sideshift			6"/152 mm		
Mast tilt - forward	J		45°		
Mast tilt - rearward	K		12°		
Travel speed (standard)		19 mph	19 mph	19 mph	12 mph
Gradeability			25%		
Tire size type & size (standard)		Drive (pneumatic) 15.5 x 25 - 12 ply			
		Steer (pneumatic) 14 x 17.5 - 14 ply			
Engine manufacturer & model		Ecomax T4i Series diesel			
Cylinders		4			
Engine output (gross power)		74 hp @ 2 200 rpm			
Peak torque		243 ft-lbs @ 1 100 rpm			
Transmission type		Power reversing synchromesh			
Noise level at operator's ear (at engine idle)		72 dbA			
Noise level at operator's ear (at full rpm)		88 dbA			

Because of our constant dedication to product improvement, all specifications are subject to change without notice.

— All Sellick forklifts meet or exceed all ANSI B56.6 safety standards. —



sellick

Working for you

Built in the Sellick tradition of quality & reliability, the S Series is supported by a network of long-established material handling dealers that provide prompt parts and service.

All Sellick products are backed by one of the best warranties in the business.

All Sellick forklifts meet or exceed all ANSI B56.6 safety standards.



Sellick Equipment Limited

P.O. Box 1000/358 Erie Street North
Harrow, Ontario, Canada N0R 1G0
519-738-2255 • sellick@mnsi.net
Visit us at www.sellickequipment.com



Sold & serviced by: